

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

# FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF A PORTION OF THE WEST BOUNDARY,

A PORTION OF THE NORTH BOUNDARY,

AND A

PORTION OF THE SUBDIVISIONAL LINES,

AND THE

SUBDIVISIONS OF 6 AND 7

IN

TOWNSHIP 20 SOUTH, RANGE 26 EAST

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

Jerry L. Thomas  
Cadastral Surveyor

Under special instructions dated *September 4, 2001*, approved *September 4, 2001*, which provided for the surveys included under Group Number *939*, and assignment instructions dated *September 10, 2001*,

Survey commenced *September 25, 2001*  
Survey completed *October 3, 2001*

# INDEX DIAGRAM

Township 20 South, Range 26 East

2	3	4	5
	6		
2	3		
	7		
	3		
	18		
	19		
	20		
	30		
	29		
	31		
	32		

The Subdivision of Section 6.....	Page 4
The Subdivision of Section 7.....	Page 7

## TOWNSHIP 20 SOUTH, RANGE 26 EAST, SALT LAKE MERIDIAN, UTAH

The following field notes describe the dependent resurvey of a portion of the west boundary, a portion of the north boundary, and a portion of the subdivisional lines, and the subdivision of sections 6 and 7, Township 20 South, Range 26 East, Salt Lake Meridian, Utah.

**History of Surveys****Surveyed by****Retr. Or Resurveyed by****UTAH-COLORADO STATE BOUNDARY LINES (East Boundary)**

All	R.J. Reeves	1878		
All			A.D. Wilson	1885
Portion			F.E. Baxter	1894
Portion			H.W. Miller	1910
Portion			G.B. Hatch	1963-66
Portion			C.P. Sylvester	1964-66

**SOUTH BOUNDARY (Fourth Standard Parallel South)**

All	H.W. Miller	1910
-----	-------------	------

**WEST BOUNDARY**

Portion	F.E. Baxter	1894		
Portion	H.W. Miller	1910	H.W. Miller	1910
Portion			G.B. Hatch	1963-66

**NORTH BOUNDARY**

All	F.E. Baxter	1894		
All			G.B. Hatch	1963-66
Portion			J.L. Thomas	1991

**SUBDIVISION**

Portion	F.E. Baxter	1894		
Portion	H.W. Miller	1910		
Portion			C.P. Sylvester	1964-66

The survey was executed in accordance with the specifications set forth in the Manual of Survey Instructions for Group No. 939, Utah, dated September 4, 2001.

Preliminary to the resurvey, a diligent search was made for any evidence of the original field note record. Coordinates by the use of Global Positioning System (GPS) equipment was determined for each found and proportioned corner in this survey. True bearings and distances were calculated by inverting between these points.

The geographic position of National Geodetic Survey Triangulation Station "HOG" is as follows:

Latitude 38° 55' 33.70295" N. Longitude 109° 01' 18.04106" W. N.A.D. 1984 (1992), Elev. 7599 ft.

DEPENDENT RESURVEY OF A PORTION OF THE WEST TOWNSHIP LINE,  
T. 20 S., R. 26 E., SALT LAKE MERIDIAN, UTAH

The geographic position of the corner of sections 7, 8, 17, and 18, as determined by G.P.S. methods from National Geodetic Survey Triangulation Station "HOG" is as follows:

Latitude 39° 04' 26.801" N. Longitude 109° 04' 13.979" W. N.A.D. 1983, Elev. 4660 ft.

The mean magnetic declination as projected from the U.S. Geological Survey Magnetic Declination Map of 1990, is: 12 ½° E.

DEPENDENT RESURVEY OF A PORTION OF THE WEST TOWNSHIP LINE,  
T. 20 S., R. 26 E., SALT LAKE MERIDIAN, UTAH

Reestablishment of the Survey Executed by F.E. Baxter in 1894,  
and the Resurvey by G.B. Hatch in 1963-66

CHAINS

From the 1/4 section corner of sections 7 and 12, on the west boundary of the township, monumented with an iron post, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked as described in the official record of the 1963-66 resurvey.

N. 0° 04.3' E., between sections 7 and 12, on the west boundary of the township.

- 40.171** Point for the corner of sections 1, 6, 7, and 12, on the west boundary of the township, at proportionate distance; there is no remaining evidence of the 1963-66 corner.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with a magnet at base, and aluminum cap marked:

T20S	
R25E R26E	
S1	S6
S12	S7
2001	

N. 0° 04.7' W., between sections 1 and 6, on the west boundary of the township.

- 40.171** The 1/4 section corner of sections 1 and 6, on the west boundary of the township, monumented with an iron post, 2 ½ inches diameter, projecting 6 inches above ground and in a collar of stone, with brass cap marked as described in the official record of the 1963-66 resurvey.

Dependent Resurvey of a Portion of the North Township Line,  
T. 20 S., R. 26 E., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by F.E. Baxter in 1894, and the  
Resurveys by G.B. Hatch in 1963-66 and J.L. Thomas in 1991

DEPENDENT RESURVEY OF A PORTION OF THE NORTH TOWNSHIP LINE,  
T. 20 S., R. 26 E., SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 5, 6, 31, and 32, monumented with an iron post, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked as described in the official record of the 1963-66 resurvey.

N. 89° 51.4' W., between sections 6 and 31, on the north boundary of the township.

- 20.084** The E 1/16 section corner of sections 6 and 31, on the north boundary of the township, monumented with an aluminum post, 2 ½ inches diameter, projecting 6 inches above ground, with aluminum cap marked as described in the official record of the 1991 resurvey.

---

N. 89° 53.1' W., beginning new measurement.

- 20.080** True point for the 1/4 section corner of sections 6 and 31, on the north boundary of the township, at proportionate distance; there is no remaining evidence of the aluminum post from the 1991 resurvey; not monumented.

- 21.080** The witness 1/4 section corner of sections 1 and 6, on the north boundary of the township, monumented with an iron post, 2 ½ inches diameter, projecting 2 inches above ground, with brass cap marked as described in the official record of the 1963 resurvey.

---

Dependent Resurvey of a Portion of the Subdivisional  
Lines, T. 20 S., R. 26 E., Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by F.E. Baxter in 1894, and the  
Resurvey by C.P. Sylvester in 1964-66

---

From the corner of sections 7, 8, 17, and 18, monumented with an iron post, 2 ½ inches diameter, with brass cap marked as described in the official record of the 1964-66 resurvey.

S. 89° 53.4' W., between sections 7 and 18.

- 40.032** True point for the 1/4 section corner of sections 7 and 18, at proportionate distance; not monumented.
- 43.713** The witness 1/4 section corner of sections 7 and 18, monumented with an iron post, 2 ½ inches diameter, projecting 6 inches above a collar of stone, with brass cap marked as describe in the official record of the 1964-66 resurvey.

---

From the corner of sections 5, 6, 7, and 8, monumented with an iron post, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked as described in the official record of the 1964-66 resurvey.

S. 89° 49.8' W., between sections 6 and 7.

- 20.064** Point for the E 1/16 section corner of sections 6 and 7; not monumented.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL  
LINES, T. 20 S., R. 26 E., SALT LAKE MERIDIAN, UTAH

## CHAINS

**40.128** The 1/4 section corner of sections 6 and 7, monumented with an iron post, 2 ½ inches diameter, projecting 6 inches above a collar of stone, with brass cap marked as described in the official record of the 1964-66 resurvey.

---

N. 89° 55.6' W., beginning new measurement.

**19.960** Point for the W 1/16 section corner of sections 6 and 7.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with a magnet at base, and aluminum cap marked:

	T20S R26E
	<u>S6</u>
W 1/16	S7
	2001

**39.920** The corner of sections 1, 6, 7, and 12, on the west boundary of the township, hereinbefore described.

---

From the corner of sections 5, 6, 7, and 8.

N. 0° 05.4' E., between sections 5 and 6.

**20.101** Point for the S 1/16 section corner of sections 5 and 6; not monumented.

**39.802** The witness 1/4 section corner of sections 5 and 6, monumented with an iron post, 2 ½ inches diameter, projecting 6 inches above a collar of stone, with brass cap marked as described in the official record of the 1964-66 resurvey.

---

N. 0° 11.9' E., beginning new measurement.

**0.400** True point for the 1/4 section corner of sections 5 and 6, falls in wash; not monumented.

**20.500** Point for the N 1/16 section corner of sections 5 and 6, not monumented.

**42.430** The corner of sections 5, 6, 31, and 32, on the North boundary of the township hereinbefore described.

---

The Subdivision of Section 6,  
T. 20 S., R. 26 E., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 6 and 7.

N. 0° 06.9' E., on the N-S center line of section 6.

THE SUBDIVISION OF SECTION 6,  
T. 20 S., R. 26 E., SALT LAKE MERIDIAN, UTAH

## CHAINS

**20.136** Point for the center S 1/16 section corner of section 6.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, and a magnet at base with aluminum cap marked:

T20S R26E  
C  
S 1/16 | S6  
C  
2001

**40.272** Point for the center 1/4 section corner of section 6, at intersection with the E-W center line.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 26 inches in the ground, and a magnet at base with aluminum cap marked:

T20S R26E  
C 1/4 S6  
2001

**60.366** Point for the center N 1/16 section corner of section 6.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 26 inches in the ground, and a magnet at base with aluminum cap marked:

T20S R26E  
C  
N 1/16 | S6  
C  
2001

**82.434** True point for the 1/4 section corner of sections 6 and 31, on the north boundary of the township, hereinbefore described.

From the true point for the 1/4 section corner of sections 5 and 6.

S. 89° 55.8' W., on the E-W center line of section 6.

**20.053** Point for the center E 1/16 section corner of section 6.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, and a magnet at base with aluminum cap marked:

T20S R26E  
C E 1/16 C  
S6  
2001

THE SUBDIVISION OF SECTION 6,  
T. 20 S., R. 26 E., SALT LAKE MERIDIAN, UTAH

CHAINS

**40.106** The center 1/4 section corner of section 6.

**80.158** The 1/4 section corner of sections 1 and 6, on the west boundary of the township, hereinbefore described.

From the center E 1/16 section corner of section 6.

N.  $0^{\circ} 09.2' E.$ , on the N-S center line of the NE 1/4 of section 6.

**20.097** Point for the NE 1/16 section corner of section 6, at intersection with the E-W center line of the NE 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, and a magnet at base with aluminum cap marked:

T20S R26E  
NE 1/16 S6  
2001

**42.101** The E 1/16 section corner of sections 6 and 31, on the north boundary of the township, hereinbefore described.

From the point for the N 1/16 section corner of sections 5 and 6; not monumented.

S.  $89^{\circ} 55.6' W.$ , on the E-W center line of the NE 1/4 of section 6.

**20.068** The NE 1/16 section corner of section 6.

**40.134** The center N 1/16 section corner of section 6.

From the point for the E 1/16 section corner of sections 6 and 7; not monumented.

N.  $0^{\circ} 06.1' E.$ , on the N-S center line of the SE 1/4 of section 6,

**20.118** Point for the SE 1/16 section corner of section 6, at intersection with the E-W centerline of the SE 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, and a magnet at base, with aluminum cap marked:

T20S R26E  
SE 1/16 S6  
2001

**40.236** The center E 1/16 section corner of section 6.

From the point for the S 1/16 section corner of sections 5 and 6; not monumented.



THE SUBDIVISION OF SECTION 6,  
T. 20 S., R. 26 E., SALT LAKE MERIDIAN, UTAH

CHAINS

S. 89° 52.8' W., on the E-W center line of the SE 1/4 of section 6.

**20.059** The SE 1/16 section corner of section 6.

**40.118** The center S 1/16 section corner of section 6.

The Subdivision of Section 7,  
T. 20 S., R. 26 E., Salt Lake Meridian, Utah

From the true point for the 1/4 section corner of sections 7 and 18.

N. 0° 02.2' W., on the N-S center line of section 7.

**40.138** The true point for the center 1/4 section corner of section 7, at intersection with the E-W centerline, falls on face of a sandstone ledge; not monumented .

**80.150** The 1/4 section corner of sections 6 and 7.

From the 1/4 section corner of sections 7 and 8, monumented with an iron post, 1 inch diameter, projecting 4 inches above a 4 ft. base by 20 inches high, mound of stone, with brass cap marked as described in the official record of the 1964-66 resurvey.

S. 89° 50.7' W., on the E-W center line of section 7.

**37.741** Point selected for the witness center 1/4 section corner of section 7.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with aluminum cap marked:

WC  
T20S R26E  
← C 1/4 S7  
2001

**40.087** The true point for the center 1/4 section corner of section 7.

**60.087** True point for the center W 1/16 section corner of section 7, falls on top of a sandstone mesa, which was inaccessible; not monumented.

**80.087** The 1/4 section corner of sections 7 and 12, on the west boundary of the township, hereinbefore described.

From the true point for the center W 1/16 section corner of section 7.

N. 0° 01.1' E., on the N-S center line of the NW 1/4 of section 7.

THE SUBDIVISION OF SECTION 7,  
T. 20 S., R. 26 E., SALT LAKE MERIDIAN, UTAH

## CHAINS

**9.726** Point selected for the witness center W 1/16 section corner of section 7.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with aluminum cap marked:

WC  
T20S R26E  
C  $\frac{W \ 1/16}{S7}$  C  
2001  
↓

**40.092** The W 1/16 section corner of sections 6 and 7.

---

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**FIELD ASSISTANTS**


Name	Capacity
Daniel W. Webb	Chief Cadastral Surveyor for Utah
Matthew Peck	Survey Aid

## CERTIFICATE OF SURVEY

I, **Jerry L. Thomas, Cadastral Surveyor**, hereby certify upon honor that, in pursuance of special instructions bearing the date of the *4<sup>th</sup> day of September, 2001*, I have *dependently resurveyed a portion of the west boundary, a portion of the north boundary, and a portion of the subdivisional lines, and the subdivision of sections 6 and 7, in Township 20 South, Range 26 East*, of the *Salt Lake Meridian*, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

Sept. 6, 2002

Date

  
(Cadastral Surveyor)


## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey of a portion of the west boundary, a portion of the north boundary, and a portion of the subdivisional lines, and the subdivision of sections 6 and 7, in Township 20 South, Range 26 East*, of the *Salt Lake Meridian*, in executed by *Jerry L. Thomas* having been critically examined and found correct, are hereby approved.

April 22, 2003

Date

  
(Chief Cadastral Surveyor for Utah)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF A PORTION OF THE UTAH-COLORADO STATE BOUNDARY LINE

(EAST BOUNDARY),

A PORTION OF THE SOUTH BOUNDARY,

A PORTION OF THE WEST BOUNDARY,

AND A PORTION OF THE SUBDIVISIONAL LINES,

AND THE

SUBDIVISION OF SECTIONS 17, 20, 29, 30, AND 31,

IN

TOWNSHIP 21 SOUTH, RANGE 26 EAST

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

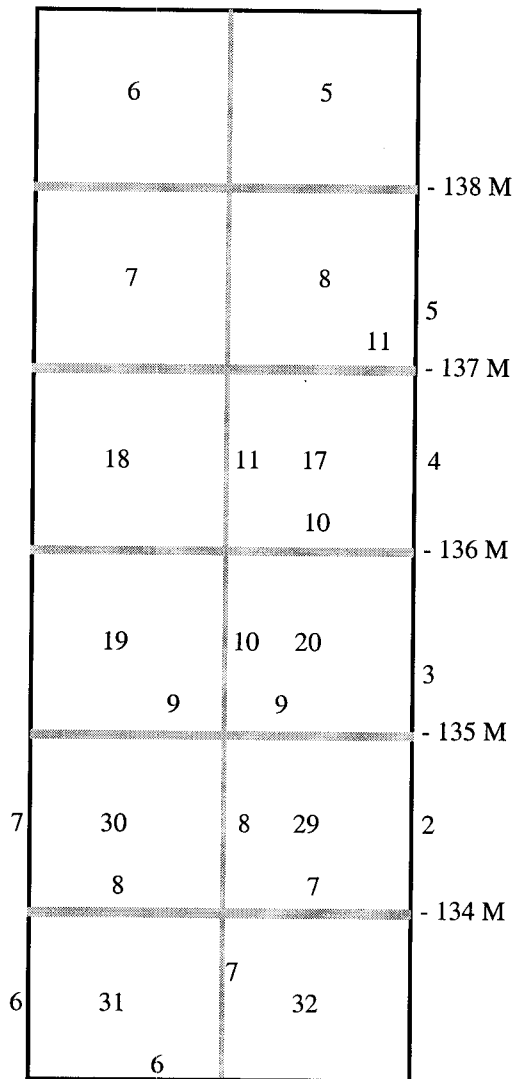
*Jerry L. Thomas*  
*Cadastral Surveyor*

Under special instructions dated *September 4, 2001*, approved *September 4, 2001*, which provided for the surveys included under Group Number *939*, and assignment instructions dated *September 10, 2001*,

Survey commenced *October 4, 2001*  
Survey completed *October 25, 2001*

# INDEX DIAGRAM

Township 21 South, Range 26 East



The Subdivision of Section 17.....	Page 11
The Subdivision of Section 20.....	Page 13
The Subdivision of Section 29.....	Page 16
The Subdivision of Section 30.....	Page 19
The Subdivision of Section 31.....	Page 20

## TOWNSHIP 21 SOUTH, RANGE 26 EAST, SALT LAKE MERIDIAN, UTAH

The following field notes describe the dependent resurvey of a portion of the Utah-Colorado State Boundary Line, (east boundary), a portion of the south boundary, a portion of the west boundary, and a portion of the subdivisional lines, and the subdivision of sections 17, 20, 29, 30, and 31, Township 21 South, Range 26 East, Salt Lake Meridian, Utah.

**History of Surveys**

Surveyed by		Retr. Or Resurveyed by	
UTAH-COLORADO STATE BOUNDARY LINE (East Boundary)			
All	R.J. Reeves	1878	
All			A.D. Wilson
All			H.W. Miller
Portion			C.P. Sylvester
			1885
			1910
			1964-66
SOUTH BOUNDARY			
All	H.W. Miller	1910	
Portion			C.P. Sylvester
			1964-66
WEST BOUNDARY			
All	H.W. Miller	1910	
NORTH BOUNDARY (Fourth Standard Parallel South)			
All	H.W. Miller	1910	
SUBDIVISION			
All	H.W. Miller	1910	

The survey was executed in accordance with the specifications set forth in the Manual of Survey Instructions for Group No. 939, Utah, dated September 4, 2001.

Preliminary to the resurvey, a diligent search was made for any evidence of the original field note record. Coordinates by the use of Global Positioning System (GPS) equipment was determined for each found and proportioned corner in this survey. True bearings and distances were calculated by inverting between these points.

The geographic position of National Geodetic Survey Triangulation Station "HOG" is as follows:

Latitude 38°55' 33.70295" N. Longitude 109°01' 18.04106" W. N.A.D. 1984 (1992), Elev. 7599 ft.

The geographic position of the corner of sections 5, 6, 31, and 32, on the south boundary of the township, as determined by G.P.S. methods from National Geodetic Survey Triangulation Station "HOG" is as follows:

Latitude 38° 55' 43.102" N. Longitude 109° 04' 24.803" W. N.A.D. 1983, Elev. 6050 ft.

## TOWNSHIP 21 SOUTH, RANGE 26 EAST, SALT LAKE MERIDIAN, UTAH

The mean magnetic declination as projected from the U.S. Geological Survey Magnetic Declination Map of 1990, is: 12 ½° E.

---

Dependent Resurvey of a Portion of the Utah-Colorado State Boundary Line,  
(East Boundary), T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by R.J. Reeves in 1878,  
and the Resurvey by A.D. Wilson in 1855 and H.W. Miller in 1910

---

**CHAINS**

From Mile Corner 134 on the Utah-Colorado State Boundary Line (east boundary of the township), monumented with an iron post, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked as described in the official record of the 1964-66 resurvey by C. P. Sylvester

N. 0° 36.8 E., on the Utah-Colorado State Boundary line.

**20.242** True point for the closing corner of sections 29 and 32.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, and in a collar of stone, with aluminum cap marked:

T21S		C
R26E		O
C S29		L
C S32		O
2001		

From this corner, the closing corner of sections 29 and 32, monumented with an iron post, 2 inches diameter, projecting 12 inches above ground, with brass cap marked as described in the official record of the 1910 survey, bears N. 89° 51.3' E., 0.354 chains distance.

I remarked the closing corner to function as an amended monument by adding AM and 2001 to brass cap,.

**60.210** Point for the E 1/4 section corner of section 29, at midpoint between the NE and SE closing corners, and on the Utah-Colorado Boundary Lines.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, and a magnet at base, with aluminum cap marked:

T21S		
U T26E		C
T 1/4		O
A S29		L
H 2001		O

Corner is located in an E-W fence, 13 ft. west of the corner of fences bearing N., S. and W.



---

Dependent Resurvey of a Portion of the Utah-Colorado State Boundary Line,  
(East Boundary), T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

Also from this corner, the center of a 16 ft. wide N and S gravel road, bears W, 24 ft.

- 80.194** Point for the N 1/16 section corner of section 29, at midpoint between the E 1/4 section corner and the NE closing corner, on the Utah-Colorado State Boundary Line.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, and a magnet at base, with aluminum cap marked:

T21S		C
R26E		O
N 1/16		L
S29		O
2001		

Corner is locating 3 ft. E of a N and S fence line.

- 84.396** Point for Mile Corner 135 at proportionate distance; there is no remaining evidence of the 1885 sandstone corner.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with aluminum cap marked:

135M	
U	C
T	O
A	L
H	O
2001	

---

N. 0° 26.8' E., on the Utah-Colorado State Boundary Line.

- 15.782** True point for the closing corner of sections 20 and 29.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S		C
R26E		O
C S20		L
C S29		O
2001		

From this corner, the closing corner of sections 20 and 29, monumented with an iron post, 2 inches diameter, projecting 12 inches above ground, with brass cap marked as described in the official record of the 1910 survey, bears S. 89° 57.6' W., 0.084 chains distance.

---

Dependent Resurvey of a Portion of the Utah-Colorado State Boundary Line,  
(East Boundary), T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

I remarked the closing corner to function as an amended monument by adding AM and 2001 to brass cap.

- 55.814** Point for the E 1/4 section corner of section 20, at midpoint between the NE and SE closing corners, and on the Utah-Colorado Boundary Lines.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 30 inches in the ground, and a magnet at base, with aluminum cap marked:

T21S	C
R26E	O
1/4	L
S20	O
2001	

Corner is located in center of a N and S dirt road, with a N and S fence line on W edge of road.

- 81.064** The Mile Corner 136 on the Utah-Colorado State Boundary Line, monumented with an iron post, 3 inches diameter, projecting 12 inches above ground, with brass cap marked as described in the official record of the 1910 resurvey.

---

N. 0° 27.1' E., on the Utah-Colorado State Boundary Line.

- 14.782** True point for the closing corner of sections 17 and 20.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, and a magnet at base, with aluminum cap marked:

T21S	C
R26E	O
C S17	L
S20	O
2001	

From this corner, the closing corner of sections 17 and 20, monumented with an iron post, 2 inches diameter, projecting 12 inches above ground, with brass cap marked as described in the official record of the 1910 survey, bears N. 89° 58.5' E., 0.038 chains distance.

I remarked the closing corner to function as an amended monument by adding AM and 2001 to brass cap.

- 34.765** Point for the S 1/16 section corner of section 17, at midpoint between the SE closing corner and the E 1/4 corner of section 17, hereinafter described, on the Utah-Colorado State Boundary Line.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, and a magnet at base, with aluminum cap marked:

---

Dependent Resurvey of a Portion of the Utah-Colorado State Boundary Line,  
(East Boundary), T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

T21S	C
R26E	O
S 1/16	L
S17	O
2001	

Corner is located 33 ft. W of a N and S dirt road on flat land, in sagebrush and juniper.

- 54.748** Point for the E 1/4 section corner of section 17, at midpoint between the NE and SE closing corners, and on the Utah-Colorado State Boundary Lines.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, and a magnet at base, with aluminum cap marked:

T21S	C
R26E	O
1/4	L
S17	O
2001	

Corner is located on level ground on westerly edge of sagebrush area.

- 81.143** The Mile Corner 137 on the Utah-Colorado State Boundary Line, monumented with an iron post, 3 inches diameter, firmly set, projecting 16 inches above ground, with brass cap marked as described in the official record of the 1910 resurvey.

---

N. 0° 38.8' E., on the Utah-Colorado State Boundary Line.

- 13.571** True point for the closing corner of sections 8 and 17.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, and a magnet at base, with aluminum cap marked:

T21S	C
R26E	O
S8 C	L
S17 C	O
2001	

From this corner, the closing corner of sections 8 and 17, monumented with an iron post, 2 inches diameter, projecting 12 inches above ground, with brass cap marked as described in the official record of the 1910 survey, bears N. 89° 51.7' E., 0.062 chains distance.

I remarked the closing corner to function as an amended monument by adding AM and 2001 to brass cap.

---

Dependent Resurvey of the Utah State Boundary Line,  
(East Boundary) T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

- 81.005** The Mile Corner 138, on the Utah-Colorado Boundary Line, remonumented by U.S. Coast and Geodetic Survey with a brass cap imbedded in concrete marked:

138 M  
USC & GS  
  
UTAH COLO  
1931  
1954

---

Dependent Resurvey of a Portion of the South Boundary,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by H.W. Miller in 1910

---

From the witness 1/4 section corner of sections 6 and 31, on the south boundary of the township, monumented with an iron post, 1 inch diameter, projecting 10 inches above ground, with brass cap marked as described in the official record of the 1910 resurvey.

S. 89° 54.8' E., between sections 6 and 31, on the south boundary of the township.

- 0.300** True point for the 1/4 section corner of sections 6 and 31, on the south boundary of the township, falls in wash; not monumented.
- 40.280** The corner of sections 5, 6, 31, and 32, on the south boundary of the township, monumented with an iron post, 3 inches diameter, projecting 12 inches above ground, with brass cap marked as described in the official record of the 1910 survey.
- 

Dependent Resurvey of a Portion of the West Boundary,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by H.W. Miller in 1910

---

From the 1/4 section corner of sections 31 and 36, on the west boundary of the township, monumented with an iron post, 1 inch diameter, projecting 10 inches above ground, with brass cap marked as described in the official record of the 1910 survey.

N. 0° 04.0' E., between sections 31 and 36, on the west boundary of the township.

---

Dependent Resurvey of a Portion of the West Boundary,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

**20.026** Point for the N 1/16 section corner of sections 31 and 36, on the west boundary of the township; not monumented.

**40.052** The corner of sections 25, 30, 31, and 36, on the west boundary of the township, monumented with an iron post, 3 inches diameter, projecting 12 inches above ground, with brass cap marked as described in the official record of the 1910 survey.

---

N. 0° 06.7' E., between section 25 and 30 on the west boundary of the township.

**39.949** The 1/4 section corner of sections 25 and 30 on the west boundary of the township, monumented with an iron post, 1 inch in diameter, projecting 10 inches above ground, with brass cap marked as described in the official record of the 1910 survey.

---

Dependent Resurvey of a Portion of the Subdivisional  
Lines, T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by H.W. Miller in 1910

---

From the 1/4 section corner of sections 31 and 32, monumented with an iron post, 1 inch diameter, projecting 10 inches above ground, with brass cap marked as described in the official record of the 1910 survey.

N. 0° 02.6' W., between sections 31 and 32.

**20.036** Point for the N 1/16 section corner of sections 31 and 32.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with a magnet at base, and aluminum cap marked:

T21S R26E  
N 1/16  
S31 | S32  
2001

Corner is located in a N and S fence line.

**40.072** The corner of sections 29, 30, 31, and 32, monumented with an iron post, 2 inches diameter, in a mound of stone, with brass cap marked as described in the official record of the 1910 survey.

---

S. 89° 59.2' E., between sections 29 and 32.

**19.992** Point for the W 1/16 section corner of sections 29 and 32, not monumented.

---

Dependent Resurvey of a Portion of the Subdivisional  
Lines, T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

**39.984** The 1/4 section corner of sections 29 and 32, monumented with an iron post, 1 inch diameter, projecting 12 inches above ground, with brass cap marked as described in the official record of the 1910 survey.

---

N. 89° 51.3' E., beginning new measurement.

**47.268** The closing corner of sections 29 and 32, on the Utah-Colorado State Boundary Line, hereinbefore described.

---

From the corner of sections 25, 30, 31, and 36, on the west boundary of the township, hereinbefore described.

S. 89° 49.3' E., between sections 30 and 31.

**19.998** Point for the W 1/16 section corner of sections 30 and 31, not monumented.

**39.996** The 1/4 section corner of sections 30 and 31, monumented with an iron post, 1 inch diameter, projecting 10 inches above ground, with brass cap marked as described in the official record of the 1910 survey.

---

N. 89° 55.9' E., beginning new measurement.

**19.935** Point for the E 1/16 section corner of sections 30 and 31, not monumented.

**39.870** The corner of sections 29, 30, 31, and 32.

---

N. 0° 01.1' W., between sections 29 and 30.

**20.015** Point for the S 1/16 section corner of sections 29 and 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 12 inches in the ground to bedrock, and a magnet at base, in a mound of stone, 4 ft. base, to top of aluminum cap marked:

T21S R26E  
S 1/16  
S30 | S29  
2001

Corner is located on a N facing slope, 12 ft. west of a power line.

**40.030** Point for the 1/4 section corner of sections 29 and 30, as determined by the 1910 record tie of N. 72° 00.0' W., 1.980 chains distance to the NW cedar bearing tree, marked 1/4 S30 BT.

---

Dependent Resurvey of a Portion of the Subdivisional  
Lines, T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

Set a 5/8 inch diameter rebar, 18 inches long, flush with the surface of the ground, with aluminum cap marked:

T21S R26E  
1/4  
S30 | S29  
2001

Corner is located on the E edge of a gravel road, bears NE and SW.

There is no remaining evidence of the NE bearing tree.

---

N. 0° 01.1' W., beginning new measurement.

**20.015** Point for the N 1/16 section corner of sections 29 and 30; not monumented.

**40.030** The corner of sections 19, 20, 29, and 30, monumented with an iron post, 2 inches diameter, projecting 12 inches above ground, with brass cap marked as described in the official record of the 1910 survey.

---

S. 89° 54.7' E., between sections 20 and 29.

**19.997** Point for the W 1/16 section corner of sections 20 and 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R26E  
W1/16 S20  
S29  
2001

**39.994** The 1/4 section corner of sections 20 and 29, monumented with an iron post, 1 inch diameter, projecting 10 inches above ground, with brass cap marked as described in the official record of the 1910 survey.

---

N. 89° 57.6' E., beginning new measurement.

**47.990** The amended monument for the closing corner of sections 20 and 29, for the 1910 survey, hereinbefore described.

**48.074** The closing corner of sections 20 and 29, on the Utah-Colorado State Boundary Line; hereinbefore described.

---

From the 1/4 section corner of sections 19 and 30, monumented with an iron post, 1 inch diameter,

---

Dependent Resurvey of a Portion of the Subdivisional  
Lines, T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

projecting 10 inches above ground, with brass cap marked as described in the official record of the 1910 survey.

S. 89° 55.8'E., between sections 19 and 30.

**40.026** The corner of sections 19, 20, 29, and 30.

---

N. 0° 09.1'E., between sections 19 and 20.

**20.002** Point for the S 1/16 section corner of sections 19 and 20; not monumented.

**40.004** The 1/4 section corner of sections 19 and 20, monumented with an iron post, 1 inch diameter, projecting 10 inches above the ground, with brass cap marked as described in the official record of the 1910 resurvey.

---

N. 0° 05.1'E., beginning new measurement.

**20.015** Point for the N 1/16 section corner of sections 19 and 20.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 28 inches in the ground, and a magnet at base, in a mound of stone, with aluminum cap marked:

T21S R26E  
N 1/16  
S19 | S20  
2001

Corner is located in juniper on a steep NW slope, above ravine that drains W.

**40.030** The corner of sections 17, 18, 19, and 20, monumented with an iron post, 2 inches diameter, projecting 12 inches above ground, with brass cap marked as described in the official record of the 1910 survey.

---

S. 89° 57.8'E., between sections 17 and 20.

**19.980** Point for the W 1/16 section corner of sections 17 and 20.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 28 inches in the ground, in a collar of stone, aluminum cap marked:

T21S R26E  
W 1/16 S17  
S20  
2001



---

Dependent Resurvey of a Portion of the Subdivisional  
Lines, T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

Corner is located in juniper on an E. slope. A rock pinnacle bears S. 26° E.

- 39.960** The 1/4 section corner of sections 17 and 20, monumented with an iron post, 1 inch diameter, projecting 10 inches above ground, with brass cap marked as described in the official record of the 1910 survey.
- 

N. 89° 58.5' E., beginning new measurement.

- 20.002** Point for the E 1/16 section corner of sections 17 and 20.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 26 inches in the ground, and a magnet at base, with aluminum cap marked:

T21S R26E  
E 1/16  $\frac{S17}{S20}$   
2001

Corner is located in old fence line, that bears E and W.

A new fence corner bears N. 6° W., 80 links which bears N and S. 88° E.

- 48.552** The closing corner of sections 17 and 20, on the Utah-Colorado State Boundary Line, hereinbefore described.
- 

From the corner of sections 17, 18, 19, and 20.

N. 0° 00.6' W., between sections 17 and 18.

- 37.730** The 1/4 section corner of sections 17 and 18, monumented with an iron post, 1 inch diameter, in a mound of stone, with brass cap marked as described in the official record of the 1910 survey.
- 

From the 1/4 section corner of sections 8 and 17, monumented with an iron post, 1 inch diameter, 14 inches above ground, with brass cap marked as described in the official record of the 1910 survey.

N. 89° 51.7' E., between sections 8 and 17.

- 48.895** The closing corner of sections 8 and 17, on the Utah-Colorado State Boundary Line; hereinbefore described.
- 

The Subdivision of Section 17,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

---

The Subdivision of Section 17,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

From the 1/4 section corner of sections 17 and 20.

N. 0° 13.9' E., on the N-S center line of section 17.

**19.381** Point for the center S 1/16 section corner of section 17.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 26 inches in the ground, and a magnet at base with aluminum cap marked:

T21S R26E  
C  
S 1/16 | S17  
C  
2001

Corner is located on a gentle SE slope, near an E and W fence line that bears N, 85 links distance.

**38.762** Point for the center 1/4 section corner of section 17, at intersection with the E-W center line.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, and a magnet at base with aluminum cap marked:

T21S R26E  
C 1/4 S17  
2001

Corner is located on a gentle E slope in grass.

**79.828** The 1/4 section corner of sections 8 and 17.

---

From the 1/4 section corner of sections 17 and 18.

N. 88° 33.8' E., on the E-W center line of section 17.

**20.066** Point for the center W 1/16 section corner of section 17.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 6 inches in the ground to bedrock, and a magnet at base, in a mound of stone, with aluminum cap marked:

T21S R26E  
C  $\frac{W\ 1/16}{S17}$  C  
2001

Corner is located in a ravine in a burned area.

---

The Subdivision of Section 17,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

**40.132** The center 1/4 section corner of section 17.

**60.064** Point for the center E 1/16 section corner of section 17; not monumented.

**88.852** The E 1/4 section corner of section 17 on the Utah-Colorado State Boundary Line; hereinbefore described.

---

From the E 1/16 section corner of sections 17 and 20.

N. 0° 07.2' E., on the N-S center line of the SE 1/4 of section 17.

**19.627** Point for the SE 1/16 section corner of section 17, at intersection with the E-W center line of the SE 1/4.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, flush with the surface of the ground, and a magnet at base, with aluminum cap marked:

T21S R26E  
SE 1/16 S17  
2001

Corner is located on the W. edge of a dirt road that bears S and N., 75 links, thence turns to the W.

From this corner, a fence bears W, 14 links, which bears S and N, 56 links to a fence corner, thence turns to the W. N of the fence corner is a gate across the dirt road and a fence that continues to the N.

**39.254** Point for the center E 1/16 section corner of section 17; not monumented.

---

From the center S 1/16 section corner of section 17.

N. 89° 16.1' E., on the E-W center line of the SE 1/4 of section 17.

**19.966** The SE 1/16 section corner of section 17.

**48.632** The S 1/16 section corner of section 17, on the Utah-Colorado State Boundary Line; hereinbefore described.

---

From the W 1/16 section corner of sections 17 and 20.

N. 0° 06.8' E., on the N-S center line of the SW 1/4 of section 17.

**38.248** The center W 1/16 section corner of section 17.

---

The Subdivision of Section 20,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

The Subdivision of Section 20,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

From the 1/4 section corner of sections 20 and 29.

N.  $0^{\circ} 06.0' E.$ , on the N-S center line of section 20.

**20.032** Point for the center S 1/16 section corner of section 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, and a magnet at base, with aluminum cap marked:

T21S R26E  
C  
S 1/16 | S20  
C  
2001

Corner is located on a S slope, 4 ft. N of an old E and W fence line. Also, a N  $60^{\circ} E.$  and S.  $60^{\circ} W.$ , fence line bears N. 3.985 chains distance.

**40.064** Point for the center 1/4 section corner of section 20, at intersection with the E-W center line.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T21S R26E  
C 1/4  
S20  
2001

Corner is located on a gentle N slope in sagebrush.

**60.067** Point for the center N 1/16 section corner of section 20; not monumented.**80.070** The 1/4 section corner of sections 17 and 20.

---

From the 1/4 section corner of sections 19 and 20.

S.  $89^{\circ} 59.6' E.$ , on the E-W center line of section 20.

**19.978** Point for the center W 1/16 section corner of section 20; not monumented.**39.956** The center 1/4 section corner of section 20.**59.945** Point for the center E 1/16 section corner of section 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, and a magnet at base, with aluminum cap marked:

---

The Subdivision of Section 20,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

T21S R26E  
C  $\frac{E\ 1/16}{S20}$  C  
2001

Corner is located on a slight rise in sagebrush.

**88.269** The E 1/4 section corner of section 20, on the Utah-Colorado Boundary Line, hereinbefore described.

---

From the center E 1/16 section corner of section 20.

N.  $0^{\circ} 07.3' E.$ , on the N-S center line of the NE 1/4 of section 20.

**40.021** The E 1/16 section corner of sections 17 and 20.

---

From the W 1/16 section corner of sections 20 and 29.

N.  $0^{\circ} 07.6' E.$ , on the N-S center line of the SW 1/4 of section 20.

**20.018** Point for the SW 1/16 section corner of section 20, at intersection with the E-W center line of the SW 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, and a magnet at base, with aluminum cap marked:

T21S R26E  
SW 1/16 S20  
2001

Corner is located on E edge of a trail road that bears N.  $45^{\circ} E.$  and S., at the corner of fences that bears S and E.

**40.036** Point for the center W 1/16 section corner of section 20; not monumented.

---

From the point for the S 1/16 section corner of sections 19 and 20; not monumented.

S.  $89^{\circ} 57.2' E.$ , on the E-W center line of the SW 1/4 of section 20.

**19.987** The SW 1/16 section corner of section 20.

**39.974** The center S 1/16 section corner of section 20.

---

From the point for the center W 1/16 section corner of section 20; not monumented.

---

The Subdivision of Section 20,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

N. 0° 05.6' E., on the N-S center line of the NW 1/4 of section 20.

**20.009** Point for the NW 1/16 section corner of section 20, at intersection with the E-W center line of the NW 1/4.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 20 inches in the ground to bedrock, and a magnet at base, in a mound of stone, 4 ft. base, to top of aluminum cap marked:

T21S R26E  
NW 1/16 S20  
2001

Corner is located on the southerly end of a N and S ridge line in juniper. Also, a pinnacle bears N. 16° W.

**40.018** The W 1/16 section corner of sections 17 and 20.

---

From the N 1/16 section corner of sections 19 and 20.

S. 89° 58.8' E., on the E-W center line of the NW 1/4 of section 20.

**19.979** The NW 1/16 section corner of section 20.

**39.958** The point for the center N 1/16 section corner of section 20; not monumented.

---

The Subdivision of Section 29,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 29 and 32.

N. 0° 00.3' W., on the N-S center line of section 29.

**20.032** Point for the center S 1/16 section corner of section 29; not monumented.

**40.064** Point for the center 1/4 section corner of section 29, at intersection with the E-W center line.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 6 inches in the ground to bedrock, in a mound of stone, 4 1/2 ft. base, to top of aluminum cap marked:

T21S R26E  
C 1/4  
S29  
2001

Corner is located on a NW slope in juniper, 20 links S of a small drainage, course N. 65° W.

---

The Subdivision of Section 29,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

**60.041** Point for the center N 1/16 section corner of section 29.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, and a magnet at base, with aluminum cap marked:

T21S R26E  
C  
N 1/16 | S29  
C  
2001

**80.018** The 1/4 section corner of sections 20 and 29.

---

From the 1/4 section corner of sections 29 and 30.

N. 89° 58.6' E., on the E-W center line of section 29.

**19.995** Point for the center W 1/16 section corner of section 29.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 15 inches in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap marked:

T21S R26E  
C  $\frac{W\ 1/16}{S29}$  C  
2001

Corner is located 10 links N of a small drainage to the SW.

**39.990** The center 1/4 section corner of section 29.

**87.687** The E 1/4 section corner of section 29, on the Utah-Colorado State Boundary Line, hereinbefore described.

---

From the center N 1/16 section corner of section 29.

N. 89° 58.0' E., on the E-W center line of the NE 1/4 of section 29.

**47.910** The N 1/16 section corner of section 29, on the Utah-Colorado State Boundary Line; hereinbefore described.

---

From the point for the W 1/16 section corner of sections 29 and 32; not monumented.

N. 0° 00.7' W., on the N-S center line of the SW 1/4 of section 29.

---

The Subdivision of Section 29,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

**20.024** Point for the SW 1/16 section corner of section 29, at intersection with the E-W center line of the SW 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, and a magnet at base, with aluminum cap marked:

T21S R26E  
SW 1/16  
S29  
2001

Raise a mound of stone, west of the corner.

Corner is located on gentle N slope in juniper.

**40.048** The center W 1/16 section corner of section 29.

---

From the S 1/16 section corner of sections 29 and 30.

S. 89° 59.8' E., on the E-W center line of the SW 1/4 of section 29.

**19.994** The SW 1/16 section corner of section 29.

**39.988** The point for the center S 1/16 section corner of section 29; not monumented.

---

From the center W 1/16 section corner of section 29.

N. 0° 00.6' W., on the N-S center line of the NW 1/4 of section 29.

**19.996** Point for the NW 1/16 section corner of section 29, at intersection with the E-W center line of the NW 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, and a magnet at base, with aluminum cap marked:

T21S R26E  
NW 1/16 S29  
2001

**39.992** The W 1/16 section corner of sections 20 and 29.

---

From the point for the N 1/16 section corner of sections 29 and 30; not monumented.

S. 89° 58.0' E., on the E-W center line of the NW 1/4 of sections 29.

**19.996** The NW 1/16 section corner of section 29.



---

The Subdivision of Section 29,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

**39.992** The center N 1/16 section corner of section 29.

---



---

The Subdivision of Section 30,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 30 and 31.

N. 0° 08.1' W., on the N-S center line of section 30.

**20.038** Point for the center S 1/16 section corner of section 30.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, and a magnet at base, with aluminum cap marked:

T21S R26E  
C  
S 1/16 | S30  
C  
2001

Corner is located on W edge of draw, drains SW.

**40.076** Point for the center 1/4 section corner of section 30, at intersection with the E-W center line; not monumented.

**80.158** The 1/4 section corner of sections 19 and 30.

---

From the 1/4 section corner of sections 25 and 30, on the west boundary of the township, hereinbefore described.

EAST, on the E-W center line of section 30.

**39.820** Point for the center 1/4 section corner of section 30; not monumented.

**59.795** Point for the center E 1/16 section corner of section 30.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, and a magnet at base, with aluminum cap marked:

T21S R26E  
C — E 1/16 — C  
S30  
2001

---

The Subdivision of Section 30,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

**79.770** The 1/4 section corner of sections 29 and 30.

---

From the point for the E 1/16 section corner of sections 30 and 31; not monumented.

N. 0° 04.6' W., on the N-S center line of the SE 1/4 of section 30.

**20.026** Point for the SE 1/16 section corner of section 30, at intersection with the E-W center line of the SE 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, and a magnet at base, with aluminum cap marked:

T21S R26E  
SE 1/16 S30  
2001

**40.052** The center E 1/16 section corner of section 30.

---

From the center S 1/16 section corner of section 30.

N. 89° 57.9' E., on the E-W center line of the SE 1/4 of section 30.

**19.955** The SE 1/16 section corner of section 30.

**39.910** The S 1/16 section corner of sections 29 and 30.

---

The Subdivision of Section 31,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

From the true point for the 1/4 section corner of sections 6 and 31, on the south boundary of the township, hereinbefore described.

N. 0° 02.3' E., on the N-S center line of section 31.

**40.033** The center 1/4 section corner of section 31, monumented with an aluminum post, 2 inches diameter, projecting 18 inches above ground, with aluminum cap marked:

WESTERN ENG INC  
C 1/4  
S31  
LS 6035

"BLM 2001" was added to the aluminum cap. This is accepted as a careful and faithful determination of

---

The Subdivision of Section 31,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

the corner position.

- 60.016** The center N 1/16 section corner of section 31, monumented with an aluminum post 2 inches diameter projecting 20 inches above the ground, with aluminum cap marked:

WESTERN ENG INC  
N 1/16  
C  
| S31  
C  
LS 6035

"BLM 2001" was added to the aluminum cap. This is accepted as a careful and faithful determination of the corner position.

- 80.005** The 1/4 section corner of sections 30 and 31.
- 

From the 1/4 section corner of sections 31 and 36, on the west boundary of the township, hereinbefore described.

S. 89° 55.9' E., on the E-W center line of section 31.

- 20.017** The center W 1/16 section corner of section 31 monumented with an aluminum post, 2 inches diameter, projecting 16 inches above ground, with aluminum cap marked:

WESTERN ENG INC  
W 1/16  
C — C  
S31  
LS 6035

"BLM 2001" was added to the aluminum cap. This is accepted as a careful and faithful determination of the corner position.

- 40.019** The center 1/4 section corner of section 31.

- 79.948** The 1/4 section corner of sections 31 and 32.
- 

From the center N 1/16 section corner of section 31.

EAST, on the E-W center line of the NE 1/4 of section 31.

- 39.900** The N 1/16 section corner of sections 31 and 32.
-

---

The Subdivision of Section 31,  
T. 21 S., R. 26 E., Salt Lake Meridian, Utah

---

**CHAINS**

From the center W 1/16 section corner of section 31.

N. 0° 01.5' E., on the N-S center line of the NW 1/4 of section 31.

- 20.011** The NW 1/16 section corner of section 31, monumented with an aluminum post, 2 inches diameter, projection 5 inches above ground with aluminum cap marked:

WESTERN ENG INC  
NW 1/16  
S31  
LS 6035

BLM 2001" was added to the aluminum cap. This is accepted as a careful and faithful determination of the corner position.

---

N. 0° 03.6' E., beginning new measurement.

- 20.001** Point for the W 1/16 section corner of sections 30 and 31; not monumented.

---

From the point for the N 1/16 section corner of sections 31 and 36, on the west boundary of the township, hereinbefore described; not monumented.

S. 89° 53.7' E., on the E-W center line of the NW 1/4 of section 31.

- 20.002** The NW 1/16 section corner of section 31.

---

S. 89° 51.2' E., beginning new measurement.

- 20.006** The center N 1/16 section corner of section 31.
-

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND Management

**FIELD ASSISTANTS**

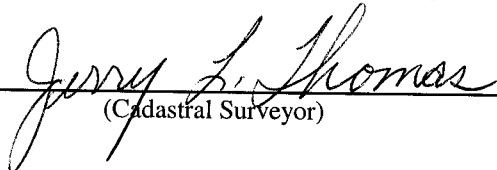
Name	Capacity
Daniel W. Webb	Chief Cadastral Surveyor for Utah
Matthew Peck	Survey Aid

## CERTIFICATE OF SURVEY

I, **Jerry L. Thomas, Cadastral Surveyor**, hereby certify upon honor that, in pursuance of special instructions bearing the date of the *4<sup>th</sup> day of September, 2001*, I have *dependently resurveyed a portion of the Utah-Colorado State Boundary Line, (east boundary), a portion of the south boundary, a portion of the west boundary, and a portion of the subdivisional lines, and the subdivision of sections 17, 20, 29, 30, and 31, in Township 21 South, Range 26 East*, of the *Salt Lake Meridian*, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

October 10, 2002

Date

  
(Cadastral Surveyor)


## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey of a portion of the Utah-Colorado State Boundary Line, (east boundary), a portion of the south boundary, a portion of the west boundary, and a portion of the subdivisional lines, and the subdivision of sections 17, 20, 29, 30, and 31, in Township 21 South, Range 26 East*, of the *Salt Lake Meridian*, in executed by **Jerry L. Thomas, Cadastral Surveyor** having been critically examined and found correct, are hereby approved.

April 22, 2003

Date



(Chief Cadastral Surveyor for Utah)